


LNA box with back cover removed

Main board connector has been unplugged to make the view more clear. The two solder pads for the grounding capacitor are at the upper right corner of the main board and are labeled "J2".

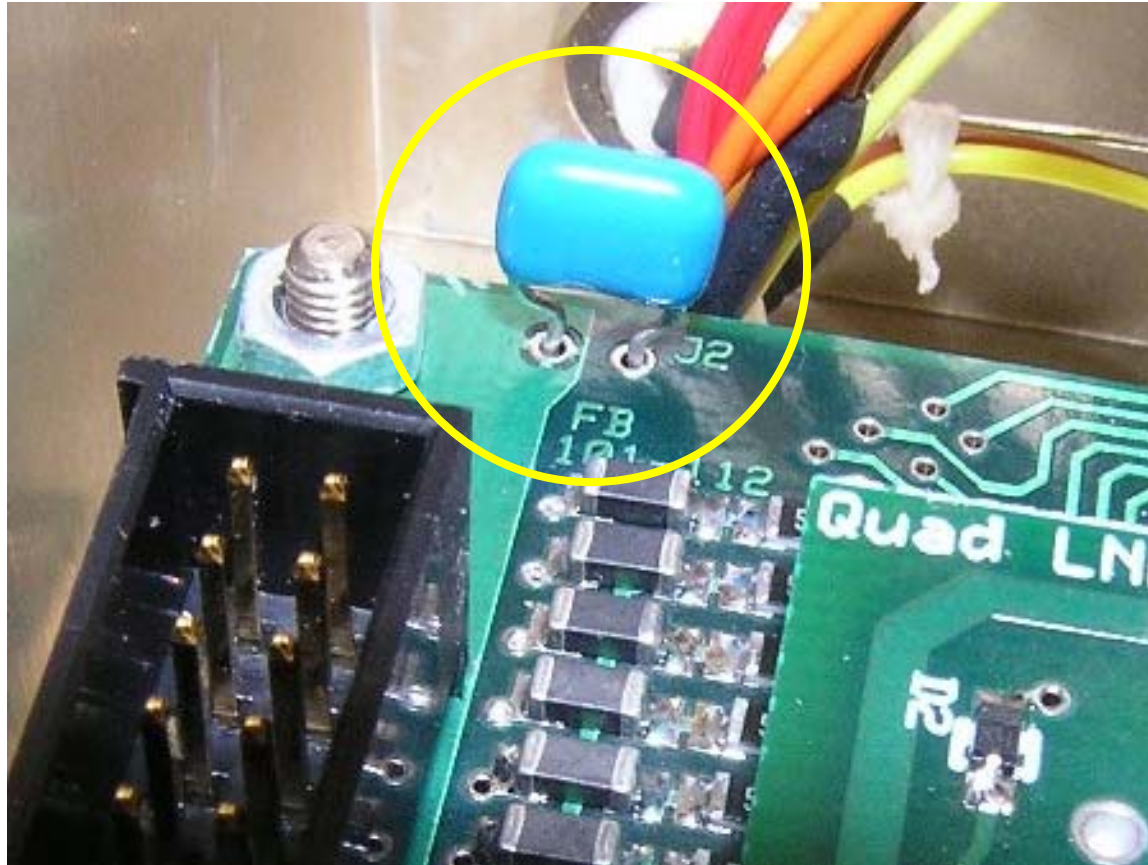

0.1uF capacitor installed in J2

The 0.1uF capacitor has had its leads trimmed so that they are clear of the control board underneath the main board. It just needs to be soldered into place, and the modification is complete.